


## FLAT PLATE ASTRAGALS - Exposed Fastening

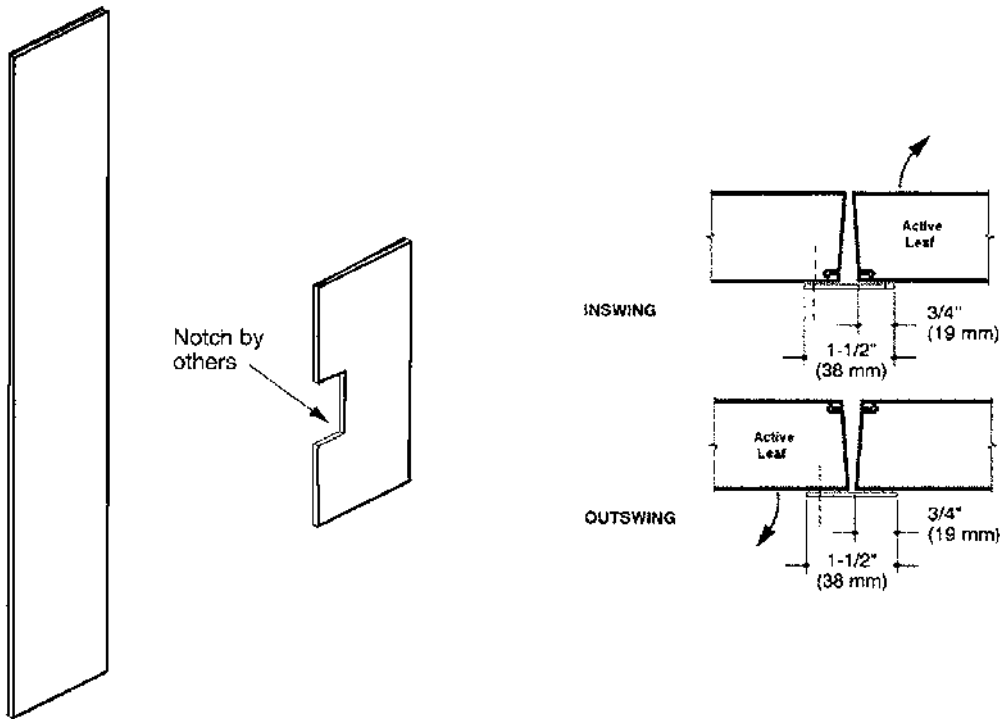

### PURPOSE:

Astragals are used to close the gap between pairs of doors. The astragal seals the opening from weather, light, and in some cases, sound. Security requirements dictate the appropriate application.

### APPLICATION:

- Attached to the outside of the active leaf on swing-out doors
- Attached to the outside of the inactive leaf on swing-in doors
- The astragal is a 14 gage (1.7mm) steel part; attached by using screws or by welding to the proper door leaf
- For this type of astragal, a wide inactive leaf is recommended
- When a conventional lock and strike are used, notching for the strike lip is performed in the field by others
- See Hardware Preparations Section for strike, lock front and flush bolt preparation

### PRODUCT AVAILABILITY:

This product option is available for Steelcraft L, SL, B, T, CE, A, and AN Series doors. See the Fire Rated Products Section for application to Fire Rated doors.